



ISBN	978-81-929866-6-1
Website	icsscet.org
Received	25 – February – 2016
Article ID	ICSSCCET051

VOL	02
eMail	icsscet@asdf.res.in
Accepted	10 - March – 2016
eAID	ICSSCCET.2016.051

# Prediction and Optimization of Process Parameters for Cylindrical Grinding of Inconel718 Alloy using Taguchi Approach

A Babau<sup>1</sup>, A K Shaik Dawood<sup>2</sup>, I Balaguru<sup>3</sup>

<sup>1,3</sup>Department of Mechanical Engineering, Karpagam Institute of Technology, Coimbatore, India.

<sup>2</sup>Department of Mechanical Engineering, King Khalid University, Saudi Arabia.

**Abstract-** This paper discusses the use of Taguchi for minimizing the surface roughness in machining Nickel based alloy (Inconel 718) with a Silicon carbide grinding wheel. The experiments have been conducted using Taguchi's experimental design technique. The cutting parameters such as grit size, depth of cut and coolants are used. The effect of cutting parameters on surface roughness is evaluated and the optimum cutting condition for minimizing the surface roughness is determined. The experimental results reveal that the most significant machining parameter for surface roughness is depth of cut followed by grit size. The predicted values and measured values are fairly close, which indicates that the developed model can be effectively used to predict the surface roughness in the machining of Nickel based alloy. The validation experiments have also been done to confirm the predicted value.

**Keywords**—cylindrical grinding; taguchi design; ANNOVA; MRR

## I. INTRODUCTION

The quality of surface finish is a significant factor in assessing the productivity of machined parts in machining operations. Surface finish quality of the components can be enhanced by grinding processes. In particular, cylindrical grinding is an intricate, material removal process with an immense number of influencing parameters, which are nonlinear, interdependent and complex to compute. To maximize the surface quality, the selection of grinding parameters is essential. Numerous factors influence the grinding process that a reproducible workpiece quality is hardly ever, if ever, achieved. Although a lot of efforts have been made to envisage the parameters of the grinding process, many difficulties continue since the cutting edges of the grinding wheel are not identical and perform in a different way on the workpiece at each grinding processes are dynamic in nature.

The prediction of the parameters of grinding process is essential to quantify surface roughness, which is one of the significant quality limitations for the selection of grinding parameters in process planning. Usually, practical knowledge gained by the process planners and help of data handbooks is used to select the grinding parameters [1, 2]. On the other hand, the process may be time consuming and cannot convince any financial criteria; also it cannot establish the precise optimal parameters because of limited experiments [3]. Additionally, these results are not consistent or satisfactory for deciding the optimal cutting parameters from a productivity attitude. Efficient process set-up should be model based in which the necessary surface roughness is obtained.

Statistical design of experiments (DOE) refers to the process of planning the experiment so that the suitable data can be examined using statistical techniques, ensuing in valid and objective conclusions [4-7]. DOE methods such as factorial design, RSM and Taguchi method are now extensively used for optimize the machining parameters instead of one factor at a time experimental approach which

This paper is prepared exclusively for International Conference on Systems, Science, Control, Communication, Engineering and Technology 2016 [ICSSCCET 2016] which is published by ASDF International, Registered in London, United Kingdom under the directions of the Editor-in-Chief Dr T Ramachandran and Editors Dr. Daniel James, Dr. Kokula Krishna Hari Kunasekaran and Dr. Saikishore Elangovan. Permission to make digital or hard copies of part or all of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage, and that copies bear this notice and the full citation on the first page. Copyrights for third-party components of this work must be honoured. For all other uses, contact the owner/author(s). Copyright Holder can be reached at copy@asdf.international for distribution.

2016 © Reserved by Association of Scientists, Developers and Faculties [www.ASDF.international]

**Cite this article as:** A Babau, A K Shaik Dawood, I Balaguru. "Prediction and Optimization of Process Parameters for Cylindrical Grinding of Inconel718 Alloy using Taguchi Approach". *International Conference on Systems, Science, Control, Communication, Engineering and Technology 2016*: 274-279. Print.

is prolonged and very expensive [8]. To this end, a lot research has been carried out to decide optimum process parameters and to apply various optimization methods to grinding variables of wheel speed, workpiece speed, depth of dressing, and lead of dressing using a multi-objective function model weighted approach [9-13]. Lee et al. [14] anticipated to solve the problem of optimization for the surface grinding process by using optimizing the grinding variables such as wheel speed, workpiece speed, depth of dressing, and lead of dressing, using a multi-objective function model. This research provided rough grinding and finish grinding results that demonstrated the applicability of the proposed Taguchi sliding based differential evolution algorithm, and the computational results showed that this proposed Taguchi sliding (based differential evolution algorithm can obtain better results. Krishna and Rao [15] proposed a scatter search based optimization approach to optimize the grinding parameters of wheel speed, workpiece speed, and depth of dressing and lead of dressing using a multiobjective function model with a weighted approach for the surface grinding process. Habib [16] developed a comprehensive mathematical model for correlating the interactive and higher order influences of various Electrical discharge machining (EDM) parameters through RSM, utilizing relevant experimental data as obtained through experimentation.

An additional main work was offered by Agarwal and Rao [17] about grinding parameter optimization. As a result of their study, a innovative analytical surface roughness model was developed on the basis of the stochastic nature of the grinding process, governed mainly by the random geometry and the random distribution of cutting edges on the wheel surface having random grain protrusion heights. Malkin [18] investigated the process monitoring and studied various grinding aspects such as cutting mechanisms, the specific energy and the interrelationship of the parameters. His research showed that the grinding process had very complex cutting mechanisms and that replicability of results was difficult to obtain under the same grinding conditions. Shaji [19] reported a study on the Taguchi method for evaluating process parameters in surface grinding with graphite as a lubricant. They analyze the effect of the grinding parameters (wheel speed, table speed, depth of cut and the dressing mode) on the surface finish and the grinding force. Kwak [3] showed that the various grinding parameters caused a geometric error generated during the surface grinding, using the Taguchi method, and that the geometric error could be predicted by means of the response surface method. Usually, the equation for predicting cutting time is unknown during the early stages of cutting operations. Jeang [20] studied to determine the optimal cutting parameters required to minimize the cutting time while maintaining an acceptable quality level. He formulated an objective function using CATIA software, with assistance from the statistical method and response surface methodology (RSM). Results showed the statistical method in cooperation with the optimal solutions found from mathematical programming can also be used as references for the possibility of robust design improvements.

This paper demonstrates how response surface designs and orthogonal array fractions can be used in a sequence of grinding experiments to devise high performance robust manufactured goods. Taking this study a step advance, the Taguchi and ANNOVA are used to envisage the surface roughness in the external cylindrical grinding of the Inconel718 alloy and also to decide the optimal grinding environment. Also, this research would benefit from future applications, particularly as initiated in real-time application such as production shop floors. It is also advantageous to carry out studies related to this in academic world as class learning exercise.

## II. Design of Experiments

Taguchi design methods are robust statistical methods devised by Genichi Taguchi to optimize the process constraints and to improve the quality of products. Contrast to conventional experimental designs that focus on the average characteristics obtained by some experiments, the Taguchi method uses a unique design of orthogonal array to inspect the quality characteristics through a least number of experiments. The experimental results based on the orthogonal array are then transformed into signal to noise (S/N) ratios (dB) to evaluate the quality characteristics [31].

In this study, the Taguchi method is utilized to establish the optimal external cylindrical grinding process parameters. The configuration of orthogonal array is based on the total degree-of-freedom (TDOF) of the objective function. The most suitable array is L27 ( $3^{13}$ ), which needs 27 runs and as 26 TDOF. To check the TDOF in the experimental design for the three levels of the test the three main factors take 6 TDOF ( $3 \times 2$ ) and the remaining TDOF are taken by interactions. The experimental plan is given in Table 1 using L27( $3^{13}$ ) Taguchi regular orthogonal array.

Table 1 L27 ( $3^{13}$ ) orthogonal array

Trial No	Control Factors		
	X	Y	Z
1	1	1	1
2	1	1	2
3	1	1	3
4	1	2	1
5	1	2	2
6	1	2	3
7	1	3	1

**Cite this article as:** A Babau, A K Shaik Dawood, I Balaguru. "Prediction and Optimization of Process Parameters for Cylindrical Grinding of Inconel718 Alloy using Taguchi Approach". *International Conference on Systems, Science, Control, Communication, Engineering and Technology 2016*: 274-279. Print.

8	1	3	2
9	1	3	3
10	2	1	1
11	2	1	2
12	2	1	3
13	2	2	1
14	2	2	2
15	2	2	3
16	2	3	1
17	2	3	2
18	2	3	3
19	3	1	1
20	3	1	2
21	3	1	3
22	3	2	1
23	3	2	2
24	3	2	3
25	3	3	1
26	3	3	2
27	3	3	3

### III. Experimental Procedure

#### A. Selection of Factors and Their Level

A sequence of experiments has been conducted to assess which grinding factors affect workpiece surface roughness. The grinding factors and their levels for the experiment are identified using previous studies carried out various researchers. Finally, three parameters were decided that can be associated with workpiece surface roughness. The factors and levels identified are given in Table 2. The other factors such as workpiece material, wheel speed, work speed and feed rate were constant.

#### B. Materials and Methods

In this present investigation, the Inconel 718 alloy is used. The Inconel 718 alloy is purchased from Keshariya Metal Pvt Ltd., Mumbai. The mechanical properties and chemical composition of the Inconel 718 alloy is illustrated in the Table 3 and Table 4 respectively. A 30mm diameter cylindrical specimen is used in this study. A conventional grinding machine is used to conduct the experiments. The cutting experiments were carried out on the cylindrical grinding machine. The Cutting tests were conducted using silicon-carbide grinding wheel of various grit sizes abrasives with vitrified bond. The grinding parameters include: grit size, depth of cut and coolants.

After the experiments, the surface roughness value measured by Mitutoyo Surfscan SJ-201 stylus type surface texture measuring instrument, and the mean roughness values measured from three different points of the machined surface were calculated. In this paper a robust approach has been represented which uses both the Taguchi and Anova to obtain optimum combination for the grinding parameters. For this purpose, the first step in the optimization process is to determine the S/N ratio for all the experimental runs by using the Taguchi methodology. The next step is to find the objective function. The objective function is formulated using the Taguchi methodology.

Table II Control factors and their levels for grinding

Symbol	Control factor	Unit	Level 1	Level 2	Level 3
A	Grit size	-	GC60	GC120	GC180
B	Depth of cut	mm	0.01	0.02	0.03
C	Coolants	-	A	B	C

where A-Cutting oil, B-Sunflower oil, C-Coconut oil.

Table III Mechanical properties of Inconel 718

Properties	Units	Values
Ultimate Tensile Strength	MPa	1240
Yield Strength	MPa	1036
Elongation	%	12
Elastic Modulus	GPa	211
Hardness	HRC	43

Table IV Chemical Composition of Inconel718 (% WEIGHT )

Ni	Cr	Cu	Mo	Nb	C	Co
50-55	17-21	0.3	2.8-3.3	4.75-5.5	0.08	1.0
Mn	P	S	Si	Ti	Al	B
0.35	0.015	0.015	0.35	0.65-1.15	0.2-0.8	0.006

## IV. Results and Discussions

### A. Analysis of the Signal-to-Noise Ratio

There are several types of quality characteristics, such as the lower-the-better, the higher-the-better and the nominal the better in the case of vibration and surface roughness that should be a minimum. In this study, therefore, the smaller the better type of the signal to noise (S/N) ratio has been used and is defined as follows:

$$S/N = -10 \log \left[ \frac{1}{n} \sum_{i=1}^n y_i^2 \right]$$

Table V Experimental results for responses and their S/N ratios

Trial No	Control Factors			Surface roughness Ra ( $\mu\text{m}$ )	S/N Ratio Ra ( $\mu\text{m}$ )
	X	Y	Z		
	Grit size	Depth of cut	Coolants		
1	60	0.01	A	0.154	-8.45
2	60	0.01	B	0.173	-7.68
3	60	0.01	C	0.151	-7.14
4	60	0.02	A	0.145	-20.11
5	60	0.02	B	0.202	-18.35
6	60	0.02	C	0.164	-17.30
7	60	0.03	A	0.235	-25.31
8	60	0.03	B	0.155	-24.61
9	60	0.03	C	0.287	-23.62
10	120	0.01	A	0.233	-8.03
11	120	0.01	B	0.174	-6.08
12	120	0.01	C	0.194	-6.49
13	120	0.02	A	0.214	-18.99
14	120	0.02	B	0.137	-17.40
15	120	0.02	C	0.142	-16.44
16	120	0.03	A	0.151	-24.27
17	120	0.03	B	0.157	-23.81
18	120	0.03	C	0.150	-22.13
19	180	0.01	A	0.136	-6.60
20	180	0.01	B	0.157	-5.99
21	180	0.01	C	0.114	-5.29
22	180	0.02	A	0.153	-17.18
23	180	0.02	B	0.175	-16.63
24	180	0.02	C	0.149	-15.41
25	180	0.03	A	0.179	-22.50
26	180	0.03	B	0.165	-22.81
27	180	0.03	C	0.232	-21.61

Table VI Response Table for Signal to Noise Ratios Smaller is better

Level	Grit size	Depth of cut	Coolants
1	-16.953	-6.861	-16.825
2	-15.959	-17.535	-15.929
3	-14.891	-23.407	-15.049
Delta	2.061	16.547	1.777
Rank	2	1	3

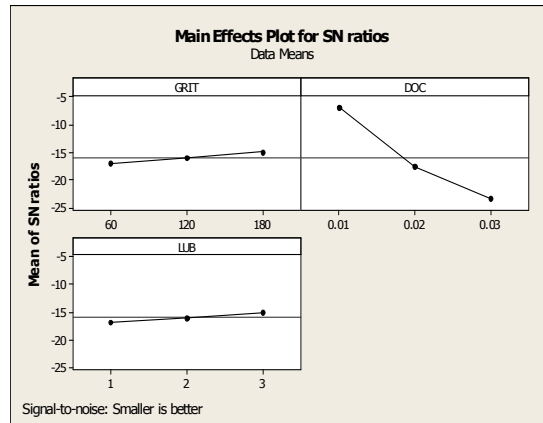


Fig.1 Effect of process parameters on Ra

## Conclusions

In this study an experimental investigation performed to evaluate the surface roughness of Inconel 718 in cylindrical grinding operation has been presented. The obtained data have been statistically processed using ANNOVA. The empirical models of output parameters are established and tested through the analysis of variance to validate the adequacy of the models. A Taguchi optimization is attempted using Minitab software for output responses in cylindrical grinding process.

## References

1. A. G. Krishna, "Optimization of surface grinding operations using a differential evolution approach", J. Mater. Process. Technol, Vol.183, pp.202-209, 2007.
2. P. Krajnik, J. Kopac and A. Sluga, "Design of grinding factors based on response surface methodology", J. Mater. Process. Technol, Vol.162 (163), pp.629-636, 2005.
3. J. S. Kwak, "Application of Taguchi and response surface methodologies for geometric error in surface grinding process", Int. J. Mach. Tools & Manuf, Vol.45 (3), 327-334, 2005.
4. D. C. Montgomery, Design and Analysis of Experiments, 4th ed., Wiley, New York, 1997.
5. H. W. Lee and W.T. Kwon, "Determination of the minute range for RSM to select the optimum cutting conditions during turning on CNC lathe", Vol. 24 (8), pp.1637-1645, 2010.
6. S. H. Baek, S. H. Hong, Seok-Swoo Cho, Deuk-Yul Jang and Won-Sik Joo, "Optimization of process parameters for recycling of mill scale using Taguchi experimental design", Vol.24 (10), pp.2127-2134, 2010.
7. J. H. Jung and W. T. Kwon, "Optimization of EDM process for multiple performance characteristics using Taguchi method and Grey relational analysis", Vol.24 (5) pp.1083-1090, 2010.
8. A. Aggarwal, H. Singh, P. Kumar and M. Singh, "Optimizing power consumption for CNC turned parts using response surface methodology and Taguchi's technique-A comparative analysis", Journal of Materials Processing Technology, 200 (1-3) pp.373-384, 2008.
9. X. Lin and H. Li, "Enhanced Pareto particle swarm approach for multi-objective optimization of surface grinding process", Proceedings of the second International Symp. Intelligent Information Technology Application, Shanghai, China, pp.618-623, 2008.
10. Kopac, M. Babor and M. Sokovic, "Optimal machining parameters for achieving the desired surface roughness in fine turning of cold pre-formed steel workpieces", Int. J. Mach. Tools & Manuf, Vol.42 (6) pp.707-716, 2002.
11. M. Tomas and Y. Beauchamp, "Statistical investigation of modal parameters of cutting tools in dry turning", Int. J. Mach. Tools & Manuf, Vol.43 (11) pp.1093-1106, 2003.

**Cite this article as:** A Babau, A K Shaik Dawood, I Balaguru. "Prediction and Optimization of Process Parameters for Cylindrical Grinding of Inconel718 Alloy using Taguchi Approach". *International Conference on Systems, Science, Control, Communication, Engineering and Technology 2016*: 274-279. Print.

12. T. R. Lin, "The use of reliability in the Taguchi method for the optimization of the polishing ceramic gauge block", *Int. J. Adv. Manuf. Technol.*, Vol.22 (3-4), 237-242, 2003.
13. T. R. Lin, "Experimental design and performance analysis of TiNcoated carbide tool in face milling stainless steel", *J. Mater. Process. Technol.*, Vol.127 (1), pp.1-7, 2002.
14. K. M. Lee, M. R. Hsu, J. H. Chou and C. Y. Guo, "Improved differential evolution approach for optimization of surface grinding process", *Expert Syst. Appl.*, Vol.38, pp.5680-5686, 2011.
15. A. G. Krishna and K. M. Rao, "Multi-objective optimization of surface grinding operations using scatter search approach", *Int. J. Adv. Manuf. Technol.* 29 (2006) 475-480.
16. S. S. Habib, "Study of the parameters in electrical discharge machining through response surface methodology approach", *Appl. Math. Model.*, Vol.33 (12) pp.4397-4407, 2009.
17. S. Agarwal and P. Venkateswara Rao, "Modeling and prediction of surface roughness in ceramic grinding", *Int. J. Mach. Tools & Manuf.* Vol.50, pp.1065-1076, 2010.
18. T. W. Hwang and S. Malkin, "Upper bound analysis for specific energy in grinding of ceramics", *Wear*, 231 (2) pp.161-171, 1999.
19. S. Shaji and V. Radhakrishnan, "Analysis of process parameters in surface grinding with graphite as lubricant based on the Taguchi method", *J. Mater. Process. Technol.*, Vol.141 (1), 51-59, 2003.
20. A. Jeang, "Robust cutting parameters optimization for production time via computer experiment", *Appl. Math. Model.* Vol.35 (3) pp.1354-1362, 2011.
21. M. S. Lou, J. C. Chen and C. M. Li, "Surface Roughness Prediction Technique For CNC End-Milling", *Journal of Industrial Technology*, Vol.15 (1), 1999.
22. S. Neeli, S. Yaldız and E. Turke, "Optimization of tool geometry parameters for turning operations based on the response surface methodology", *Measurement*, Vol.44 pp. 580-587, 2011.
23. I. Asilturk and M. Cunkas, "Modelling and prediction of surface roughness in turning operations using artificial neural network and multiple regression method", *Expert Syst. Appl.*, Vol.38 (5), pp.5826-5832, 2011.
24. O. Çolak, C. Kurbanolu and M. C. Kayacan, "Milling surface roughness prediction using evolutionary programming methods", *Mater. Design*, 28 (2) pp.657-666, 2007.
25. I. Inasaki, "Sensor fusion for monitoring and controlling grinding processes", *Int. J. Adv. Manuf. Technol.*, Vol.15 pp.730-736, 1999.
26. K. Dehghania, A. Nekahia and M. A. M Mirzaieb, "Optimizing the bake hardening behavior of Al7075 using response surface methodology", *Mater. Design*, 31 (4) pp. 1768-1775, 2010.
27. M. C. Kathleen, Y. K. Natalia and R. Jeff, *Response surface methodology, center for computational analysis of social and organizational systems (CASOS) Technical Report*, 2004.
28. H. Raymond, C. Douglas, Montgomery and M. Christine Anderson-cook, *process and product optimization using designed experiments*, John Wiley & Sons, Inc. Third Edition, 2009.
29. K. M. Desai, S. A. Survase, P. S. Saudagar, S. S. Lele and R.S. Singhal, "Comparison of artificial neural network (ANN) and response surface methodology (RSM) in fermentation media optimization: Case study of fermentative production of scleroglucan", *Biochem. Eng. J.*, Vol.41, pp. 266-270, 2008.
30. J. L. Rosa, A. Robin, M. B. Silva, C. A. Baldan, A. Carlos and M. P. Peres, "Electrodeposition of copper on titanium wires: Taguchi experimental design approach", *J. Mat. Processing Tech.*, Vol.209, pp.1181-1188, 2009.
31. L. Celik, *Monitoring vibration in grinding process and regression modelling of surface roughness*, M. S. Thesis, Selçuk University, Turkey, 2010.